

7-1-2019

## Reducing aerodynamic drag by adopting a novel road-cycling sprint position

Paul F. J. Merkes  
*Edith Cowan University*

Paolo Menaspa  
*Edith Cowan University*

Chris R. Abbiss  
*Edith Cowan University*

Follow this and additional works at: <https://ro.ecu.edu.au/ecuworkspost2013>



Part of the [Sports Sciences Commons](#)

---

[10.1123/ijsp.2018-0560](https://doi.org/10.1123/ijsp.2018-0560)

Accepted author manuscript version reprinted, by permission, from *International Journal of Sports Physiology and Performance*, 2019, 14(6): 733-738, <https://doi.org/10.1123/ijsp.2018-0560>. © Human Kinetics, Inc.

Merkes, P. F. J., Menaspa, P., & Abbiss, C. R. (2019). Reducing aerodynamic drag by adopting a novel road-cycling sprint position. *International Journal of Sports Physiology and Performance*, 14(6), 733-738.

This Journal Article is posted at Research Online.

<https://ro.ecu.edu.au/ecuworkspost2013/6705>

1 Original Investigation

2  
3 **Title:**

4 Reducing aerodynamic drag by adopting a novel road cycling sprint position.

5  
6 **Authors:**

7 Paul F.J. Merkes<sup>1</sup>, Paolo Menaspà<sup>1</sup>, and Chris R. Abbiss<sup>1</sup>

8  
9 **Affiliations:**

10 <sup>1</sup>Centre for Exercise and Sports Science Research, School of Medical and Health Sciences,  
11 Edith Cowan University, Joondalup, WA, Australia

12  
13 **Corresponding Author:**

14 Paul F.J. Merkes

15 Centre for Exercise and Sports Science Research

16 Edith Cowan University

17 270 Joondalup Drive, Joondalup, WA

18 Phone: (+61)447826963

19 E-mail address: [p.merkes@ecu.edu.au](mailto:p.merkes@ecu.edu.au)

20  
21 **Running title:** Aerodynamic drag in road cycling sprints

22 **Abstract word count:** 228

23 **Text only word count:** 3656

24 **Number of figures:** 3

25 **Number of tables:** 1

26

## 27 **Abstract**

28 **Purpose:** To assess the influence of a seated, standing, and forward standing cycling  
29 sprint position on aerodynamic drag CdA and the reproducibility of a field test of CdA  
30 calculated in these different positions. **Methods:** Eleven recreational male road cyclists rode  
31 250 m in two directions at around 25, 32, and 40 km·h<sup>-1</sup> and in each of the three positions,  
32 resulting in a total of 18 efforts per participant. Riding velocity, power output, wind direction  
33 and velocity, road gradient, temperature, relative humidity, and barometric pressure were  
34 measured and used to calculate CdA use regression analysis. **Results:** A main effect of position  
35 showed that the average CdA of the two days was lower for the forward standing position (0.295  
36 ± 0.059), compared with both the seated (0.363 ± 0.071; p = 0.018) and standing positions  
37 (0.372 ± 0.077; p = 0.037). Seated and standing positions did not differ from each other. While  
38 no significant difference was observed in CdA between the two test days, a poor between day  
39 reliability was observed. **Conclusion:** A novel forward standing cycling sprint position resulted  
40 in a 23 and 26% reduction in CdA compared with a seated and standing position. This decrease  
41 in CdA could potentially result in an important increase in cycling sprint velocity of 3.9-4.9  
42 km·h<sup>-1</sup>, although these results should be interpreted with caution since poor reliability of CdA  
43 was observed between days.

44

45 **Keywords** CdA, aerodynamics, cyclist, sprinting, between day reliability.

46

## 47 **Introduction**

48 The outcome of road cycling races is often decided by a sprint. Indeed, over half of the  
49 mass start stages during the three grand tours (i.e. Giro d'Italia, Tour de France, and Vuelta a  
50 España) as well as several of the recent World Championships, were decided in either a head-  
51 to-head, small group, or mass sprint finish. To date, road cycling sprints have not been  
52 extensively examined.<sup>1-5</sup> It appears that to be competitive in a sprint, male cyclists are required  
53 to produce high peak power outputs (e.g. 13.9-20.0 W·kg<sup>-1</sup>;<sup>4</sup> 989-1443 W<sup>1.4</sup>) over durations of  
54 approximately 9 to 17 s.<sup>1,4</sup> However, studies have also shown that peak power output is not the  
55 only important factor to success.<sup>2</sup> Indeed, a cyclist's velocity is likely to be a much more  
56 important factor in the outcome of road cycling sprints. Cycling velocity is the result of power  
57 output, aerodynamic drag (CdA), road characteristics, and environmental variables.<sup>6</sup> Therefore,  
58 CdA plays an important role in cycling, but is often overlooked, particularly within the sprint.

59 Depending on the equipment and position of a cyclist on the bicycle, aerodynamic  
60 resistance represents approximately 95% of the total resistive forces experienced when cycling  
61 at 65 km·h<sup>-1</sup>.<sup>7</sup> Additionally, the external power required to overcome aerodynamic resistance is  
62 a third polynomial of the velocity,<sup>8</sup> making it necessary to increase power output by 2% to  
63 increase a cycling velocity by 1% only, when riding at 65 km·h<sup>-1</sup>.<sup>6</sup> Reducing CdA is therefore  
64 extremely important to road cycling performance, and even more in sprint performance since  
65 sprinting is likely to be the fastest activity in road cycling (with the exclusion of some  
66 descending). Given that the outcomes of road cycling sprints are often decided by very small  
67 margins, aerodynamics are meaningful to overall sprint performances.

68 CdA can be determined using a wind tunnel or mathematical modelling.<sup>6</sup> However,  
69 wind tunnel testing is relatively expensive and facilities somewhat scarce. The research in CdA  
70 within road sprint cycling is limited with the majority of the literature focusing on time trials  
71 and endurance cycling.<sup>8-12</sup> In some of the very few studies to examine CdA in sprinters, it was  
72 found that a seated position was more aerodynamic than a standing position. In particular,  
73 Martin and colleagues<sup>6</sup> reported CdA values based on cycling position of three track sprinters.  
74 Sprinting while seated resulted in a CdA of 0.245 m<sup>2</sup>, while a standing position resulted in a  
75 CdA of 0.304 m<sup>2</sup>. In a different study, Martin and colleagues<sup>1</sup> modelled the difference in CdA  
76 between one seated (0.288 m<sup>2</sup>) and one standing sprint (0.360 m<sup>2</sup>). However, comparing

77 different positions was not the focus of these studies.<sup>1,6</sup> From data published on aerodynamics  
78 in cycling, it is known that lowering the torso<sup>8-11</sup> and head<sup>9,12</sup> significantly reduced  
79 aerodynamics. Therefore, in this study a novel cycling sprint position was assessed during  
80 which participants adopted a low and forward torso and head position (forward standing  
81 position). The aim of this study was to assess the influence of a seated, standing, and forward  
82 standing position on CdA and the reproducibility of a field test to calculate CdA in these  
83 different positions.

## 84 **Methods**

### 85 ***Participants***

86 Eleven recreational male road cyclists (age,  $37.1 \pm 6.1$  y; height,  $178.7 \pm 6.6$  cm; weight,  
87  $78.9 \pm 9.9$  kg) volunteered to participate. The participants rode  $5.2 \pm 1.0$  times and for  $10.7 \pm$   
88  $4.0$  hours per week and were classifiable as performance level 3 or higher, as per de Pauw and  
89 colleagues.<sup>13</sup> The participants completed a familiarization session and two identical  
90 aerodynamic field tests<sup>14</sup> separated by at least two days and a maximum of seven days. Prior to  
91 data collection, the subjects provided written informed consent in accordance with the Edith  
92 Cowan University Human Research Ethics Committee and the principals outlined in the  
93 Declaration of Helsinki. All participants were asked to avoid strenuous exercise and refrained  
94 from the consumption of caffeine 24 hours prior to testing.

### 95 ***Experimental design***

96 The familiarization session started with a 10-minute warm-up at a freely chosen low-  
97 intensity. Three minutes following the warm-up participants performed one of the 250 m test  
98 sections of the aerodynamic field test (described below) in three different positions (i.e. seated,  
99 standing, and forward standing; Figure 1). During the familiarization session, participants were  
100 assessed by a single investigator using video footage (described below) to determine whether  
101 they were capable to maintain each position. When a participant was not able to ride in each  
102 position he was excluded from the study. In total two participants were excluded from the study.  
103 One of the participants was not able to hold the standing and forward standing positions longer  
104 than 5 s. The video analysis did not reveal a noticeable difference between the standing and the  
105 forward standing position in the other participant.

106 During the two aerodynamic field tests participants performed the protocol described  
107 by Martin and colleagues<sup>14</sup> in three different positions three minutes after a 10-minute warm-  
108 up. Specifically, both aerodynamic testing sessions were identical and involved participants to  
109 ride 250 m in two directions at 24 to 26, 31 to 33, and 39 to 41  $\text{km}\cdot\text{h}^{-1}$  and in each of the three  
110 positions, resulting in a total of 18 efforts per participant. All efforts were conducted in a  
111 randomized and counter-balanced order. Participants were asked to reach constant velocity  
112 before entering the 250 m test section and to maintain constant velocity and selected position  
113 within the 250 m test section. A 100 m section of road was provided at the start and end of the  
114 250 m test section to allow the participants to accelerate and decelerate. The participants were  
115 required to maintain the required velocity throughout the 250 m test section which they could  
116 view on a Garmin Edge 820 head unit (Garmin, Schaffhausen, Switzerland) attached to the  
117 handle bars during the seated and standing position, and the front fork during the forward  
118 standing position. A recovery period of 4 min was given between each effort.

119 Participants completed the familiarization session and two aerodynamic field tests on a  
120 road bicycle, with the seat height and saddle setback adjusted to replicate the participant's own  
121 bicycle. The participants wore their own helmet during the field tests. The bicycle was equipped  
122 with a Verve Cycling InfoCrank power meter (Verve Cycling, Perth, Australia) containing four  
123 strain gauges per crank arm.<sup>15</sup> All tests were completed on a quiet, straight, and flat road. A  
124 high definition camera (Sony, Tokyo, Japan) was placed on the side of the road at the middle  
125  
126

127 of the 250 m test section to film the participant's sagittal plane at 25 Hz. A screenshot was taken  
 128 when the cyclists was in the middle of the video footage and exported to Adobe Illustrator  
 129 (Adobe Systems, San Jose, USA) afterwards. In this software, the front wheel was standardized  
 130 at 200 pt; then, the distances between the participant's chest and the bottom of the front wheel  
 131 (vertical) and between the participant's shoulder and the front wheel hub (horizontal) were  
 132 determined (Figure 2). A negative number for the horizontal distance meant the shoulder was  
 133 positioned in front of the frontal hub. This data was used to ascertain if the participants were  
 134 adopting the desired position. The distance of the 250 m test section was measured with the  
 135 Garmin head unit paired with the SRM speed sensor (Schoberer Rad Messtechnik, Jülich,  
 136 Germany). The SRM speed sensor was used to measure cycling velocity at the beginning  
 137 (initial) and end (final) of the 250 m test section. The average power output was measured by  
 138 the Verve Cycling InfoCrank power meter. The gradient of the 250 m test section was measured  
 139 with the Garmin head unit. Cycling velocity, average power output, and road gradient were  
 140 recorded by the Garmin head unit at 1 Hz. Absolute wind velocity and direction were measured  
 141 two times during every effort using a wireless weather station (Davis Instruments Corporation,  
 142 Hayward, USA). The turning plane of the anemometer cups was located at approximately the  
 143 same height as the participant's torso while positioned on the bicycle. A compass (Suunto,  
 144 Vantaa, Finland) was used to indicate north on the weather station and to asses riding direction.  
 145 Wind velocity parallel with the road was calculated using equation 1:<sup>14</sup>

$$146 V_a = V_W \cdot [\text{COS}(D_W - D_B)] \quad (\text{Equation 1})$$

147 in which  $V_a$  is wind velocity relative to the participant's riding direction in  $\text{m}\cdot\text{s}^{-1}$ ;  $V_W$  is absolute  
 148 wind velocity in  $\text{m}\cdot\text{s}^{-1}$ ;  $D_W$  is wind direction in  $^\circ$ ; and  $D_B$  is riding direction in  $^\circ$ . Finally,  
 149 measurements of temperature, relative humidity, and barometric pressure were recorded four  
 150 times during the session with the weather station (Davis Instruments Corporation, Hayward,  
 151 USA). The average of these four measurement was used to calculate air density using equation  
 152 2.<sup>16</sup>

$$153 \rho = \frac{P_b \cdot M_a}{R \cdot T \cdot Z} \cdot \left(1 + (\epsilon - 1) \frac{e'}{P_b}\right) \quad (\text{Equation 2})$$

154 in which  $\rho$  is air density;  $P_b$  is barometric pressure in Pa;  $M_a$  is the apparent molecular weight  
 155 of dry air;  $R$  is the universal gas constant;  $T$  is the temperature in degrees Kelvin;  $Z$  is the  
 156 compressibility factor;  $\epsilon$  is the ratio of the apparent molecular weight of dry air and the apparent  
 157 molecular weight of vapor water; and  $e'$  is the effective vapor pressure.

158 Based upon calculations of Martin and colleagues<sup>17</sup> one CdA value per position was  
 159 calculated from six trials (i.e. two directions at 24 to 26, 31 to 33, and 39 to 41  $\text{km}\cdot\text{h}^{-1}$ ). Briefly,  
 160 a regression analysis was performed using the mathematical model in equation 3:

$$161 P \cdot E - \frac{\Delta PE}{\Delta t} - \frac{\Delta KE}{\Delta t} = CdA \cdot \left(\frac{1}{2} \rho V_a^2 V_g\right) + \mu \cdot (V_g F_N) \quad (\text{Equation 3})$$

162 in which  $P$  is average power output in Watts;  $E$  is efficiency of the drive system (assumed to  
 163 be 97.7%<sup>14</sup>);  $PE$  is potential energy;  $KE$  is kinetic energy;  $CdA$  is aerodynamic drag;  $\rho$  is air  
 164 density;  $V_g$  is the ground velocity of the participants in  $\text{m}\cdot\text{s}^{-1}$ ;  $\mu$  is a global coefficient of friction  
 165 (i.e. 0.006 for rough road<sup>17</sup>); and  $F_N$  is the normal force exerted by the bicycle tires on the  
 166 rolling surface (essentially weight of the bicycle and participant).

## 167 168 **Statistical analysis**

169 The vertical and horizontal distances found in the screenshots were analyzed using a  
 170 two-way ANOVA to identify differences between the standing and forward standing position  
 171 per day. Two-tailed paired sample t-tests were used to compare environmental data (i.e. air  
 172 density and wind velocity parallel to the riding direction) and cycling velocity variability (i.e.  
 173 average standard deviation per day) between days.

174 CdA was compared between positions (i.e. seated, standing, and forward standing); and  
 175 between days using a two-way analysis of variance (ANOVA). Furthermore, partial eta squared

176 was calculated. When a main effect of position was found, pairwise comparisons using  
177 Bonferroni's corrections were performed. When an interaction effect of position and day was  
178 found an additional ANOVA was performed to identify differences in position for each day.  
179 The level of significance was set at  $p \leq 0.05$  for all tests. All statistical analyses were completed  
180 using SPSS (IMB SPSS Inc. Statistics, Chicago, USA).

181 The intra-day reliability was tested using the mean Coefficient of Variation (CV) and  
182 the Intra-class Correlation Coefficient (ICC) for each position derived from log-transformed  
183 data.<sup>18</sup> A CV lower than 3.5% was regarded as high test-retest reliability.<sup>19,20</sup>

184

## 185 **Results**

186 Results of the video analysis showed a mean  $\pm$  standard deviation for vertical and  
187 horizontal distances (average of days) of  $360.6 \pm 13.1$  and  $26.2 \pm 6.4$  pt, and  $311.6 \pm 14.06$  and  
188  $-2.7 \pm 11.1$  pt for standing and forward standing, respectively. The video analysis showed  
189 significant differences between the standing and forward standing position in both the vertical  
190 and the horizontal direction ( $F(1,10) = 107.631$ ;  $p = 0.001$ , and  $F(1,10) = 109.106$ ;  $p = 0.001$ ,  
191 respectively). No differences were found between days in both the vertical as the horizontal  
192 direction ( $F(1,10) = 0.083$ ;  $p = 0.779$ , and  $F(1,10) = 0.775$ ;  $p = 0.399$ , respectively). No  
193 differences in air density ( $t(10) = 0.295$ ;  $p = 0.774$ ); wind velocity parallel to the riding direction  
194 ( $t(10) = -0.040$ ;  $p = 0.969$ ); and cycling velocity variability ( $t(32) = -0.939$ ;  $p = 0.355$ ; two-  
195 tailed) were found between days (Table 1).

196 A significant main effect was observed for position on CdA ( $F(2,20) = 9.234$ ;  $p = 0.007$ ;  
197 Partial  $\eta^2 = 0.480$ ) (Figure 3). No main effect of day and interaction effect between position  
198 and day on CdA was observed ( $F(1,10) = 3.939$ ;  $p = 0.075$ ; Partial  $\eta^2 = 0.283$ ). Pairwise  
199 comparisons revealed a lower CdA (average of days) for the forward standing position ( $0.295$   
200  $\pm 0.059$ ), compared with both the seated ( $0.363 \pm 0.071$ ;  $p = 0.018$ ) and standing positions  
201 ( $0.372 \pm 0.077$ ;  $p = 0.037$ ). No differences in CdA were found between the seated and standing  
202 positions ( $p = 1.00$ ). A lower CdA was observed for the forward standing position compared  
203 with the standing positions on day 1 ( $p = 0.05$ ), but not on day 2 ( $p = 0.649$  and  $p = 0.073$ ,  
204 respectively). CdA was lower for the forward standing position when compared with the seated  
205 position on day 2 (0.034), but not on day 1 ( $p = 0.051$ ). Furthermore, no differences in CdA  
206 were observed between the seated and standing positions on both days ( $p = 1.00$  and  $p = 1.00$ ,  
207 respectively).

208 CV for the seated, standing, and forward standing positions were 16.0, 9.1, and 15.6%,  
209 respectively. Large to very large ICC were found for the CdA between days in the seated ( $r =$   
210  $0.530$ ), standing ( $r = 0.840$ ), and forward standing positions ( $r = 0.600$ ).

211

## 212 **Discussion**

213 The aim of this study was to assess the influence of a seated, standing, and forward  
214 standing position on CdA and the reproducibility of a field test to calculate CdA in these  
215 different positions. This research demonstrated that a forward standing position resulted in a  
216 significantly lower CdA than a seated or standing position. No difference in CdA was observed  
217 between a seated and standing position. While no significant difference was observed in CdA  
218 between the two test days, a poor between day reliability was observed.

219 While several studies have examined CdA in road cycling,<sup>8-12</sup> very few have focused on  
220 sprinting.<sup>1,6</sup> To the best of our knowledge, this is the first study assessing CdA of a novel  
221 forward standing position. It was found that this position has a 23 and 26% lower CdA  
222 compared with a seated and standing position, respectively. Applying a mathematical model to  
223 our results and previously reported data, such as average power output during road cycling  
224 sprints ( $865-1140 \text{ W}^{1,4}$ ); a cumulative weight of the bicycle and cyclist of 80 kg; road gradient  
225 of 0%; wind velocity parallel to the cyclist of  $0 \text{ m}\cdot\text{s}^{-1}$ ; and the average air density found in this

226 study ( $\rho = 1.175$ ), an 23-26% improvement in CdA would result in an increase of cycling  
227 velocity of approximately 3.9-4.9 km·h<sup>-1</sup>.<sup>17</sup> This could be a decisive improvement in velocity  
228 given that road cycling races can be decided by very small margins. It is likely that the forward  
229 standing position improved CdA due to the lower torso and head position. These changes in  
230 body position were likely to affect both the frontal area ( $A_p$ , in m<sup>2</sup>) and the drag coefficient (Cd,  
231 dimensionless). From data published on aerodynamics in cycling other than sprinting, it is  
232 known that lowering the torso<sup>8-11</sup> and head<sup>9,12</sup> significantly reduced CdA<sup>8-10,12</sup> or  $A_p$ .<sup>11</sup> Cd is  
233 dominated by the turbulence associated with the cyclist's position, shape, size, and surface  
234 roughness; as  $A_p$  changes, the flow over the cyclist will also change. In other words, decreasing  
235  $A_p$  (due to changes in cycling position) does not directly result in a lower CdA. A weak  
236 correlation exists between measured Cd and  $A_p$ , in which  $A_p$  only accounted for approximately  
237 50% of the variation in CdA between different cycling positions.<sup>21</sup>

238 In the present study, no significant difference in CdA between the seated and standing  
239 position was found. The slightly lower but non-significant group mean difference in CdA  
240 between the seated and standing position in this study (~2.5%), is lower than the differences  
241 found in other studies: 25%<sup>1</sup> and 24%.<sup>6</sup> Explanations for such discrepancies between studies  
242 could be due to differences in the characteristics of the cyclists. In the current study the average  
243 height and weight of the participants were 178.7 ± 6.6 cm and 78.9 ± 9.9 kg, respectively.  
244 Furthermore, the participants in the current study were all amateur male road cyclists. In the  
245 study of Martin and colleagues<sup>6</sup> three world-class track sprint cyclists were tested (1 male sprint  
246 specialist: 1.83 m, 96 kg; 1 male kilometer time trial specialist: 1.82 m, 87 kg; and 1 female  
247 500 m specialist: 1.65 m, 68 kg). Differences between studies might also have arisen from the  
248 test location and environmental conditions (outdoor vs. indoors<sup>6</sup>), and sample sizes in the  
249 current study (11 vs. 1<sup>1</sup> and 3,<sup>6</sup> respectively). However, in this study all trials for all three  
250 positions were performed in a randomized and counter-balanced order on a single day and  
251 therefore it is unlikely that environmental conditions were responsible for the low difference  
252 observed between the seated and the standing position. While no difference in CdA between  
253 the seated and the standing positions was observed, it has been previously shown that cyclists  
254 are able to generate greater power output in the standing position compared with the seated  
255 position.<sup>22,23</sup> The combination of a similar CdA and the possibility to generate greater power  
256 output during a standing sprint will result in a higher cycling velocity compared to a seated  
257 sprint. To date, it is unknown if cyclists can produce a similar or different power output in the  
258 forward standing position compared to other more traditional positions and may be the subject  
259 of future studies. Indeed, while this position was more aerodynamic it is plausible that changes  
260 in body position may influence the movement kinetics compromising or increasing effective  
261 pedal forces.

262 The second aim of this study was to assess the reproducibility of a field test to calculate  
263 CdA in the seated, standing, and forward standing positions. This study showed poor reliability  
264 to measure CdA in these positions. Such variability between days can be due to technological,  
265 methodological, or biological variability.<sup>24</sup> The technological variability within this study may  
266 have arisen from the equipment used (i.e. weather station, scale, stadiometer, power meter,  
267 speed sensor, and head unit). According to the manufacturer's guideline the weather station's  
268 accuracy was 1 hPa, 3%, 0.5°C, 3°, and 1 m·s<sup>-1</sup> for measuring barometric pressure, relative  
269 humidity, temperature, wind direction, and wind velocity, respectively. The Verve Cycling  
270 InfoCrank power meter showed similar mean deviation (trueness) to a mathematical model of  
271 treadmill cycling and coefficient of variation (precision), compared with the golden standard:  
272 the SRM power meter (i.e. Trueness = -1.7 ± 1.1 vs. -0.5 ± 2.4%; Precision = 0.6 ± 0.4 vs. 0.8  
273 ± 0.4%, respectively).<sup>15</sup> These small measurement errors might have resulted in the variability  
274 found in this study. Further, methodological variability in this study could have arisen from the  
275 environmental conditions and mathematical modelling. Within this study tests were conducted

276 outdoors whereas previous studies utilizing this model to calculate CdA have used the  
277 mathematic model and field test in velodromes.<sup>6</sup> Regardless, no differences in environmental  
278 conditions between the two days were observed in this study. Furthermore, the mathematical  
279 model and field test have previously been validated.<sup>6</sup> In this study the greatest biological  
280 variability would likely have been the ability of the participant to either maintain the required  
281 position or an even velocity over the entire 250 m test section. While both cycling velocity  
282 variability and the analysis of the screenshots from the videos did not show a difference between  
283 the two days, it is plausible that minor fluctuations in velocity and position occurred which  
284 might have influenced the outcomes of this study. In addition, a single camera next to the 250  
285 m test section might not have been sufficient to identify these small fluctuations. Regardless of  
286 this, this study was still able to identify differences between the forward standing and both the  
287 seated and standing positions, highlighting the large effect that the forward standing position  
288 has on CdA. In order to reduce biological variability only well-trained cyclists were recruited  
289 in this study. Furthermore, to ensure that the participants were able to maintain the required  
290 position over the test section the participants performed one week of training and one  
291 familiarization session. In the current study two participants were not able to maintain the  
292 requested positions and were excluded from this study after the familiarization session. It is  
293 plausible that this familiarization was not sufficient,<sup>25-27</sup> and more practice is needed before  
294 adopting the forward standing position for performance. Future research should examine the  
295 influence of training on the consistency of adopting such abnormal sprint positions. Other  
296 factors which might have led to these exclusions are anthropometric characteristics, poor  
297 balance and coordination, or poor cycling handling skills. However, the anthropometric  
298 characteristics of the participants in the current study suggests that cyclists within a wide range  
299 in height and weight are able to adopt and may benefit from the forward standing position.  
300 Further research is needed to identify the effect of additional familiarization or training sessions,  
301 differences in anthropometric characteristics, balance and coordination, and cycling handling  
302 skills on the reliability of this field test to identify CdA in different positions.

303

### 304 **Practical applications**

305 Lowering the torso and head during a road cycling sprint results in a decrease in CdA  
306 by 23 and 26% when compared with traditional seated and standing positions. This decrease in  
307 CdA could result in an increase of cycling sprint velocity by approximately 3.9-4.9km·h<sup>-1</sup>.  
308 Caution should be taken when testing the CdA of sprint positions in a field test. Future research  
309 should compare the power production between different positions (i.e. seated, standing, and  
310 forward standing).

311

### 312 **Conclusion**

313 A novel forward standing cycling sprint position resulted in a 23 and 26% reduction in  
314 CdA compared with a seated and standing position. This decrease in CdA could result in an  
315 increase of approximately 3.9-4.9 km·h<sup>-1</sup> in cycling sprint velocity. However, these results  
316 should be interpreted with caution since poor reliability of CdA was observed between days.  
317 Further research is required to determine factors influencing the poor reliability observed. It is  
318 plausible that more than one week of training and a single familiarization session is required to  
319 ensure reliability of CdA in these sprint positions.




320 **References**

- 321
- 322 1. Martin JC, Davidson CJ, Pardyjak ER. Understanding sprint-cycling performance: the  
323 integration of muscle power, resistance, and modeling. *International journal of sports*  
324 *physiology and performance*. 2007;2(1):5-21.
- 325 2. Menaspà P, Abbiss CR, Martin DT. Performance analysis of a world-class sprinter  
326 during cycling grand tours. *International journal of sports physiology and performance*.  
327 2013;8(3):336-340.
- 328 3. Menaspà P, Martin DT, Victor J, Abbiss CR. Maximal Sprint Power in Road Cyclists  
329 After Variable and Nonvariable High-Intensity Exercise. *Journal of strength and*  
330 *conditioning research / National Strength & Conditioning Association*.  
331 2015;29(11):3156-3161.
- 332 4. Menaspà P, Quod M, Martin DT, Peiffer JJ, Abbiss CR. Physical Demands of Sprinting  
333 in Professional Road Cycling. *International journal of sports medicine*.  
334 2015;36(13):1058-1062.
- 335 5. Menaspà P, Quod M, Martin DT, Victor J, Abbiss CR. Physiological demands of road  
336 sprinting in professional and U23 cycling. A pilot study. *J Sci Cycling*. 2013;2(2).
- 337 6. Martin JC, Gardner AS, Barras M, Martin DT. Modeling sprint cycling using field-derived  
338 parameters and forward integration. *Medicine and science in sports and exercise*.  
339 2006;38(3):592-597.
- 340 7. di Prampero PE, Cortili G, Mognoni P, Saibene F. Equation of motion of a cyclist.  
341 *Journal of applied physiology: respiratory, environmental and exercise physiology*.  
342 1979;47(1):201-206.
- 343 8. Underwood L, Schumacher J, Burette-Pommay J, Jermy M. Aerodynamic drag and  
344 biomechanical power of a track cyclist as a function of shoulder and torso angles.  
345 *Sports Eng*. 2011;14(2-4):147-154.
- 346 9. Barry N, Burton D, Sheridan J, Thompson M, Brown NAT. Aerodynamic performance  
347 and riding posture in road cycling and triathlon. *P I Mech Eng P-J Spo*. 2015;229(1):28-  
348 38.
- 349 10. García-López J, Rodríguez-Marroyo JA, Juneau CE, Peleteiro J, Martínez AC, Villa  
350 JG. Reference values and improvement of aerodynamic drag in professional cyclists.  
351 *Journal of sports sciences*. 2008;26(3):277-286.
- 352 11. Fintelman DM, Sterling M, Hemida H, Li FX. The effect of time trial cycling position on  
353 physiological and aerodynamic variables. *Journal of sports sciences*.  
354 2015;33(16):1730-1737.
- 355 12. Barry N, Burton D, Sheridan J, Thompson M, Brown NAT. Aerodynamic drag  
356 interactions between cyclists in a team pursuit. *Sports Eng*. 2015;18(2):93-103.
- 357 13. De Pauw K, Roelands B, Cheung SS, De Geus B, Rietjens G, Meeusen R. Guidelines  
358 to classify subject groups in sport-science research. *International journal of sports*  
359 *physiology and performance*. 2013;8(2):111-122.
- 360 14. Martin JC, Milliken DL, Cobb JE, McFadden KL, Coggan AR. Validation of a  
361 Mathematical Model for Road Cycling Power. *J Appl Biomech*. 1998;14(3):276-291.
- 362 15. Maier T, Schmid L, Müller B, Steiner T, Wehrli JP. Accuracy of cycling power meters  
363 against a mathematical model of treadmill cycling. *Int J Sports Med*. 2017;38(6):456-  
364 461.
- 365 16. Jones FE. The air density equation and the transfer of the mass unit. *J Res Natl Bur*  
366 *Stand*. 1978;83(5):419-428.
- 367 17. Martin JC, Gardner AS, Barras M, Martin DT. Aerodynamic drag area of cyclists  
368 determined with field-based measures. *Sportscience*. 2006;10:68-69.
- 369 18. Hopkins WG. Spreadsheets for analysis of validity and reliability. *Sportscience*.  
370 2015;19(7):36-42.
- 371 19. Hopkins WG, Schabort EJ, Hawley JA. Reliability of power in physical performance  
372 tests. *Sports Med*. 2001;31(3):211-234.
- 373 20. Jeukendrup A, Saris WHM, Brouns F, Kester ADM. A new validated endurance  
374 performance test. *Med Sci Sports Exerc*. 1996;28(2):266-270.

- 375 21. Bassett DR, Jr., Kyle CR, Passfield L, Broker JP, Burke ER. Comparing cycling world  
376 hour records, 1967-1996: modeling with empirical data. *Medicine and science in sports  
377 and exercise*. 1999;31(11):1665-1676.
- 378 22. Bertucci W, Taiar R, Toshev Y, Letellier T. Comparison of biomechanical criteria in  
379 cycling maximal effort test. *Int J of Sports Sci Eng*. 2008;02(1):33-46.
- 380 23. Reiser RF, 2nd, Maines JM, Eisenmann JC, Wilkinson JG. Standing and seated  
381 Wingate protocols in human cycling. A comparison of standard parameters. *European  
382 journal of applied physiology*. 2002;88(1-2):152-157.
- 383 24. Hopkins WG. Measures of reliability in sports medicine and science. *Sports Med*.  
384 2000;30(1):1-15.
- 385 25. Vrbik I, Sporiš G, Štefan L, et al. The influence of familiarization on physical fitness test  
386 results in primary school-aged children. *Pediatr Exerc Sci*. 2017;29(2):278-284.
- 387 26. Amarante do Nascimento M, Januário RSB, Gerage AM, Mayhew JL, Cheche Pina FL,  
388 Cyrino ES. Familiarization and reliability of one repetition maximum strength testing in  
389 older women. *J Strength Cond Res*. 2013;27(6):1636-1642.
- 390 27. Hopker JG, Coleman DA, Wiles JD, Galbraith A. Familiarisation and reliability of sprint  
391 test indices during laboratory and field assessment. *J Sports Sci Med*. 2009;8(4):528-  
392 532.  
393


394 **Figure and tables**  
395  
396

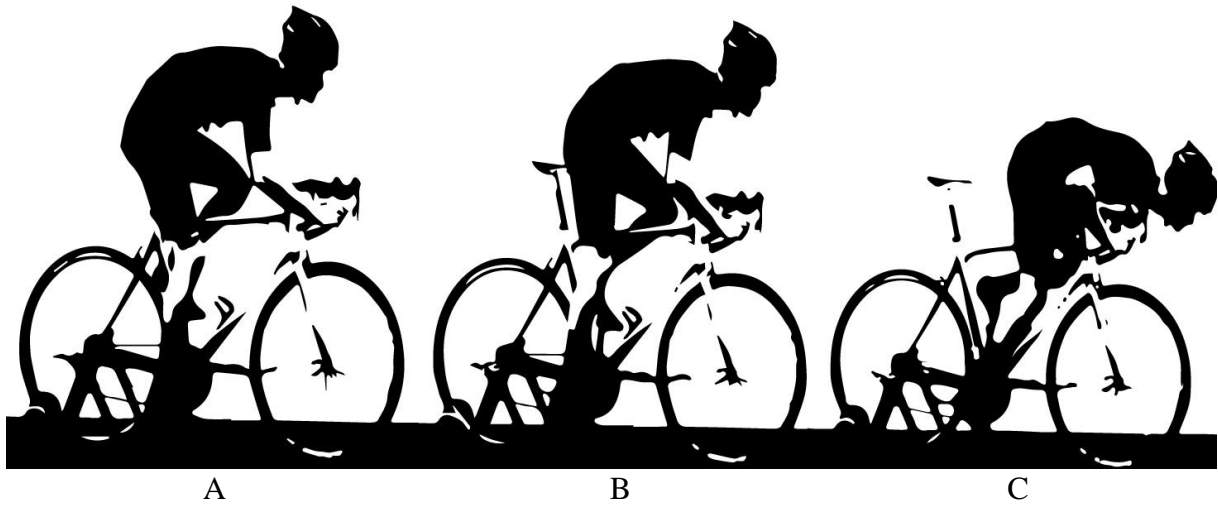

**Figure 1** The three sprinting positions: A) seated, B) standing, and C) forward standing.

397



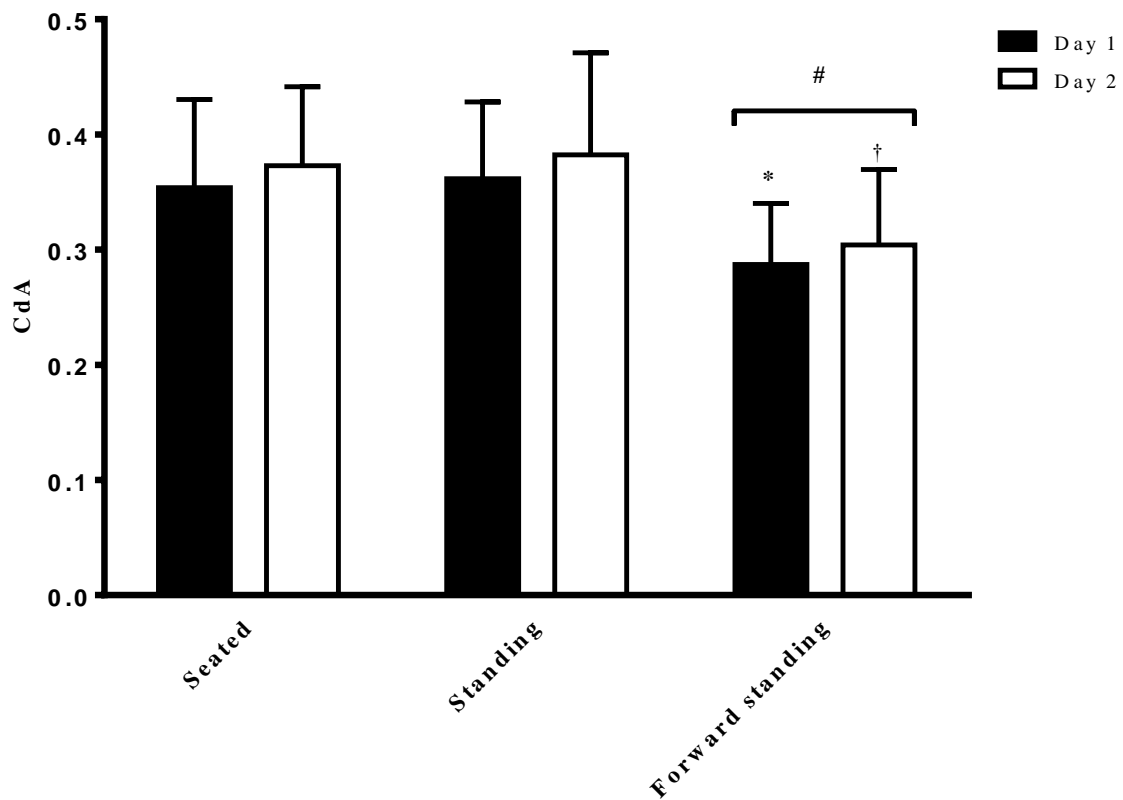

404  
 405 **Figure 3** CdA per sprinting position for day 1 and 2.  
 406 \* =  $P \leq 0.05$ ; Forward standing day 1 vs. Standing day 1.  
 407 † =  $P < 0.05$ ; Forward standing day 2 vs. Seated day 1.  
 408 # =  $P < 0.05$ ; Forward standing vs. Seated and Standing (main effect).  
 409  
 410

**Table 1** Mean  $\pm$  SD of variables used for CdA calculations.

		Seated	Standing	Forward standing
$\rho$	Day 1	1.176 $\pm$ 0.022	1.176 $\pm$ 0.022	1.176 $\pm$ 0.022
	Day 2	1.174 $\pm$ 0.017	1.174 $\pm$ 0.017	1.174 $\pm$ 0.017
$V_a$ ( $m \cdot s^{-1}$ )	Day 1	0.21 $\pm$ 0.51	-1.79 $\pm$ 0.44	-0.01 $\pm$ 0.65
	Day 2	-0.23 $\pm$ 0.50	-0.14 $\pm$ 0.50	-0.07 $\pm$ 0.56
$V_g$ variability ( $km \cdot h^{-1}$ )	Day 1	0.47 $\pm$ 0.06	0.60 $\pm$ 0.08	0.69 $\pm$ 0.17
	Day 2	0.46 $\pm$ 0.10	0.65 $\pm$ 0.14	0.71 $\pm$ 0.20

$V_g$  = the ground velocity variability of the participants;  $\rho$  = air density;  $V_a$  = wind velocity relative to the participant's riding direction.

411